

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 15 TWN. 16_N RNG. 5_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 9-30-09
Party Chief: Wilcoxon
Crew: Finney
Type of Marker: Harrison set over stone
Method of Establishment: County: 7/7/1997
IN S.P.C. E Zone, NAD 83
Name: 16051503
N: 509 955.312 2(m)
E: 75 449.935 8(m)

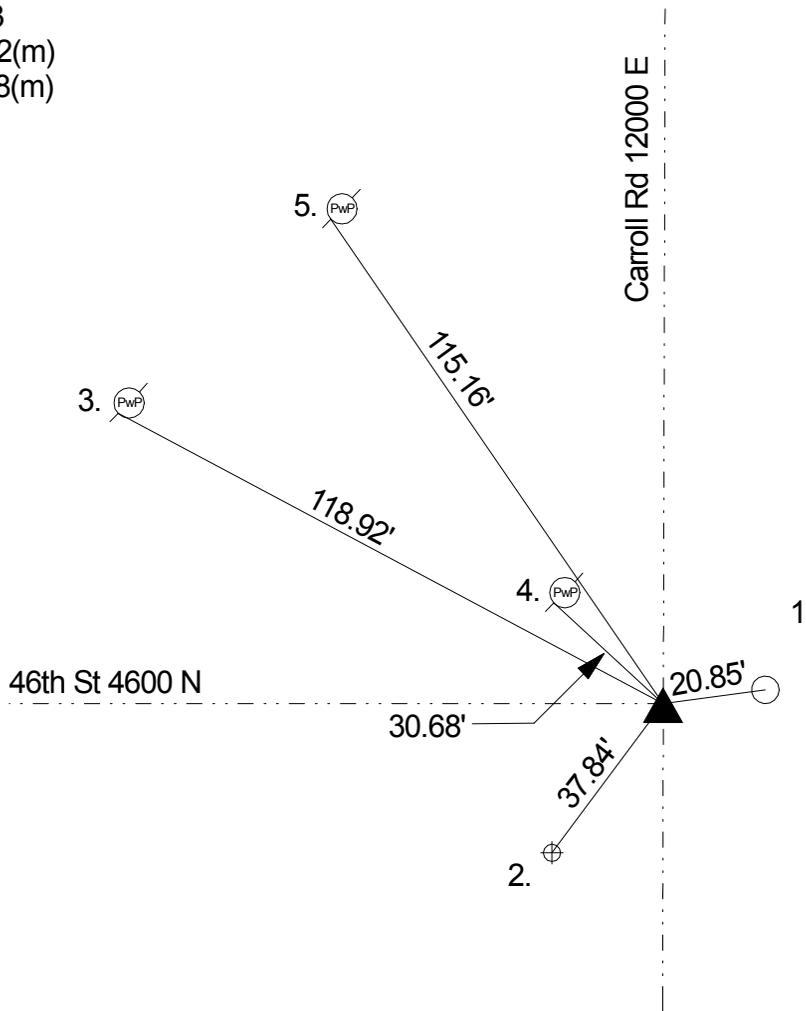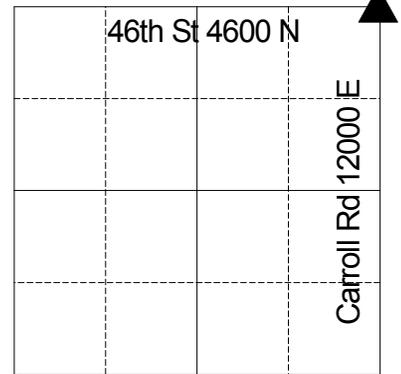

Corner was originally set as a post in 1820 by John Hendricks with the following witnesses: 11" beech N 89 E 32 links, 15" sugar S 61 W 6 links, as per the Marion County Atlas p. 15. 11-10-1873 O.W. Voohis found a rock set at corner to be 10" too far south as per p. 47 of the Surveyors record Lawrence Twp. Marion County. 11-1-1949 E. Hearne found a stone down 3" and tied to surrounding points. 8-26-63 S. Burres called stone at surface. 3-24-70 J. McLand called a stone just below surface. 3-12-75 T. Fortner called a PK nail over stone. 5-18-77 Hancock County Surveyor (Jacobs) called a brass plug and plate. 8-14-81 H.C.S. called same. 7-22-88 H.C.S. called same. 1-25-1993 Wilcoxon called a stone 8" down and a PK nail w/ washer at surface. 9-28-2003 Wilcoxon called PK nail w/ washer at surface. 9-23-09 Wilcoxon set Harrison over stone 11" down with guard pin next to it. 9-30-09 Wilcoxon retied.

REF.	DISTANCE	DESCRIPTION
1.	20.85'	Cut 'x' on top of large rock
2.	37.84'	Center of benchmark dated 1947
3.	118.92'	Mag nail w/brass washer SW PwP #178-381 F 20" up
4.	30.68'	PK nail SW PwP #32-381 F 12" up
5.	115.16'	Mag nail w/brass washer SW PwP #177-381 F 20" up